

STP225 - 20/Wd STP220 - 20/Wd

225 Watt POLYCRYSTALLINE SOLAR PANEL

Features



Guaranteed 0-5W positive power output tolerance ensures high reliability



Anti-reflective, hydrophobic coating improves light absorption and reduces surface dust



Three bus-bar design enhances cell reliability and reduces series resistance for large fill factor



Excellent performance under low light environments (mornings, evenings and cloudy days)



Entire module certified to withstand high wind loads (2400 Pascal) and snow loads (5400 Pascal) *




4.0mm thick tempered glass improves module durability



Trust Suntech to Deliver Reliable Performance Over Time

- World's leading manufacturer of crystalline silicon photovoltaic modules
- Unrivaled manufacturing capacity and world-class technology
- Rigorous quality control meeting the highest international standards : ISO 9001: 2008 and ISO 14001: 2004
- Certification and standards: IEC 61215, IEC 61730, UL 1703, conformity to CE

Industry-leading warranty

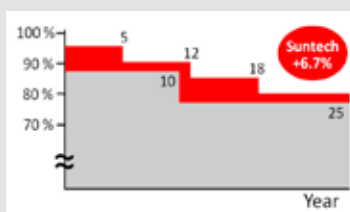

- 25 year transferrable power output warranty: 5 year/95%, 12 year/90%, 18 year/85%, 25 year/80% **
- Based on nominal power
- Warrants 6.7% more power than the market standard over 25 years
- 5 year material and workmanship warranty




Specially designed on drainage holes and rigid construction prevent frame from deforming or breaking due to freezing weather and other forces




Latest IP67 rated junction box improves module performance stability with enhanced thermal isolation.

* Please refer to Suntech Standard Module Installation Manual for details.
** Please refer to Suntech Product Warranty for details.

STP225 - 20/Wd
STP220 - 20/Wd

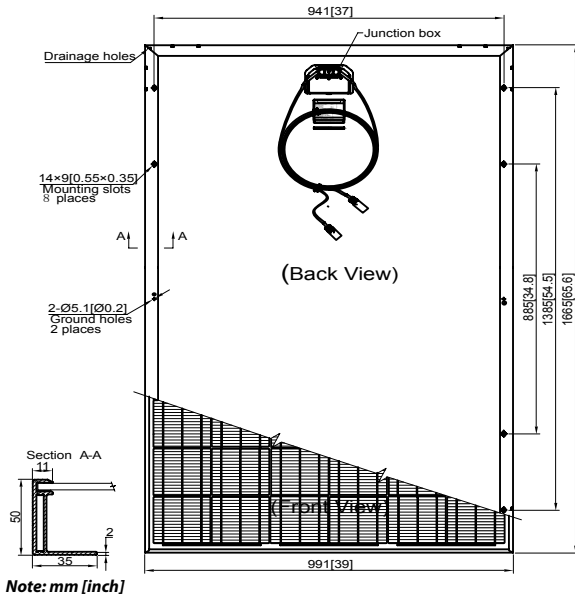

Current-Voltage & Power-Voltage Curve (220-20)

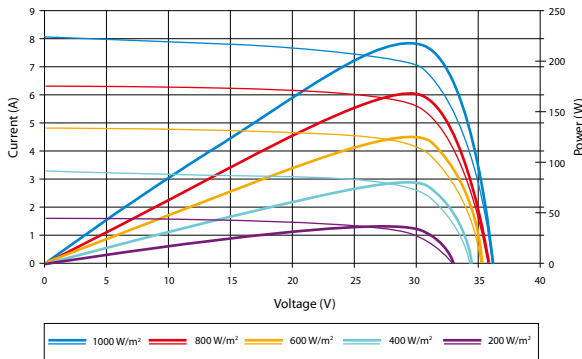

Temperature Characteristics

| | |
|---|------------|
| Nominal Operating Cell Temperature (NOCT) | 45±2°C |
| Temperature Coefficient of Pmax | -0.47 %/°C |
| Temperature Coefficient of Voc | -0.34 %/°C |
| Temperature Coefficient of Isc | 0.045 %/°C |



Specifications are subject to change without further notification

Electrical Characteristics

| STC | STP225-20/Wd | STP220-20/Wd |
|---------------------------------|------------------|------------------|
| Optimum Operating Voltage (Vmp) | 29.6 V | 29.5 V |
| Optimum Operating Current (Imp) | 7.61 A | 7.46 A |
| Open - Circuit Voltage (Voc) | 36.7 V | 36.6 V |
| Short - Circuit Current (Isc) | 8.15 A | 8.05 A |
| Maximum Power at STC (Pmax) | 225 Wp | 220 Wp |
| Operating Temperature | -40 °C to +85 °C | -40 °C to +85 °C |
| Maximum System Voltage | 1000 V DC | 1000 V DC |
| Maximum Series Fuse Rating | 20 A | 20 A |
| Power Tolerance | 0 / +5 W | 0 / +5 W |

STC: Irradiance 1000 W/m², module temperature 25 °C, AM=1.5

| NOCT | STP225-20/Wd | STP220-20/Wd |
|---|--------------|--------------|
| Maximum Power (W) | 165 Wp | 160 Wp |
| Maximum Power Voltage (V) | 26.9 V | 26.8 V |
| Maximum Power Current (A) | 6.12 A | 5.98 A |
| Open Circuit Voltage (Voc) | 33.8 V | 33.7 V |
| Short Circuit Current (Isc) | 6.65 A | 6.54 A |
| Efficiency Reduction (from 1000 W/m² to 200 W/m²) | <4.5% | <4.5% |

NOCT: Irradiance 800 W/m², ambient temperature 20 °C, wind speed 1 m/s

Mechanical Characteristics

| | |
|---------------|---|
| Solar Cell | Polycrystalline 156 × 156 mm (6 inches) |
| No. of Cells | 60 (6 × 10) |
| Dimensions | 1665 × 991 × 50 mm (65.6 × 39.0 × 2.0 inches) |
| Weight | 22.5 kgs (49.6 lbs.) |
| Front Glass | 4 mm (0.16 inches) tempered glass |
| Frame | Anodized aluminium alloy |
| Junction Box | IP67 rated |
| Output Cables | H+S RADOX® SMART cable 4.0 mm² (0.006 inches²), symmetrical lengths (-) 1000 mm (39.4 inches) and (+) 1000 mm (39.4 inches), MC4 connectors |

Packing Configuration

| Container | 20' GP | 40' HC |
|-----------------------|--------|--------|
| Pieces per pallet | 21 | 21 |
| Pallets per container | 6 | 28 |
| Pieces per container | 126 | 588 |